

	AG-M2500GF
50Hz	2000KW / 2500KVA
50Hz	1820KW / 2275KVA



- MTU 16V4000G63
- 40°C
- 24V
- : IP23 H
-
-
-
- 24V
- 9dB
-



V	Hz		COS	A	KWKVA	KWKVA
254/440	50	3	0.8	3280	2000/2500	1820/2275
240/415	50	3	0.8	3478	2000/2500	1820/2275
230/400	50	3	0.8	3608	2000/2500	1820/2275
220/380	50	3	0.8	3798	2000/2500	1820/2275

GB/T2820-97 eqvl S08528

12

1 10%





/

MTU/16V4000G63

V 16

76.3L

x

170x 210 mm

16.5

1500rpm

2185KW


ADEC



396m³/mi n

490


8.5kPa



5kPa

156m³/mi n

m³/mi n



100%

191g/kwh

75%

193g/kwh

50%

203g/kwh

100%

424.3L/h



300L

0.3%

240L

420-550kPa



225L

79

104



GB755, BS5000, VDE0530, NEMMG1-22, IEC34-1, CSA22.2 AS1359



3

Y

1

0.8

IP23

1000m

/

H/H

TIF

50

THF

2%

2250KVA

96.4%

2.69m³/s



± 5%

± 1%

100%

+25%

-20%

6S

1%

5%

1.5%

100%

+12%

-10%

5S

苏州




/ ATS

Comap

RS-232 Modbus

" " " " " "

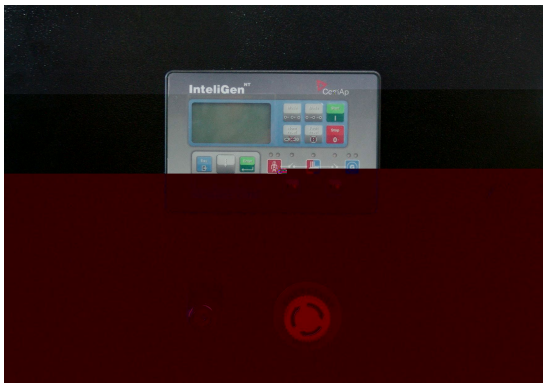

32

苏州爱瓦特