

	AG-825GF
50Hz	660KW/825KVA
50Hz	600KW/750KVA



- SC33V090D2
- 40°C
- 24V
- :
- I P23 H
- 
- 
- 
- 
- 12V
- 
- 



V	Hz		cos	A	KW/KVA	KW/KVA
440/254	50	3	0.8	1056	660/825	600/750
415/240	50	3	0.8	1110	660/825	600/750
400/230	50	3	0.8	1188	660/825	600/750
380/220	50	3	0.8	1224	660/825	600/750

GB/T2820-97 eqv I SO8528

1 10%

12





GB755, BS5000, VDE0530, NEMMG1-22, I ED34-1, CSA22 2 AS1359

:	/
	3
	Y
	1
	0.8
	IP23
	1000m
/	H/H
TIF	50
THF	2%
	750KVA
	97.8%
	0.8m³/s

	± 5%
	± 1%
100%	+25%
	-20%
	6S
	1%
	5%
	1.5%
100%	+12%
	-10%
	5S




MCCB



PNG

" "



ATS

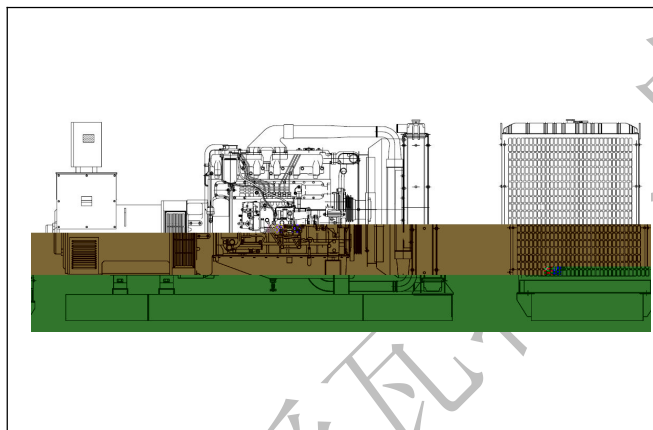

4470 mm × 1750 mm × 2350 mm  
5300kg



4650 mm × 1870 mm × 2480 mm  
5580kg

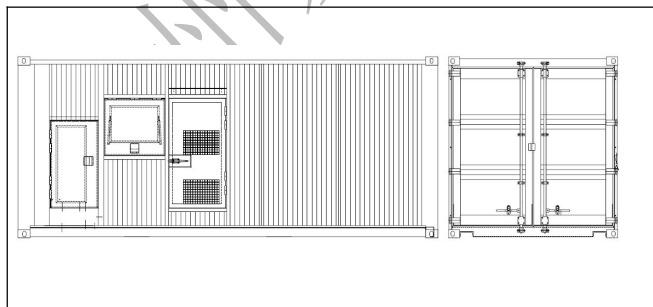

20ft

6058 mm × 2438 mm × 2591 mm  
8000kg



标准型机组控制屏是满足机组正常操作、使用的最基本配置，具有操作简便、功能齐全、保护可靠等优点。功能特点：采用众智控制器；显示屏；机组具有手动开机、关机（急停）等控制功能，具有油压低、水温高、超速、电压高、电压低、过流等多种保护功能，可满足各种机组的需要。



ATS



32