

	AG-250GF
50Hz	200KW/250KVA
50Hz	180KW/225KVA



- W0135TD19
- 40°C
- 24V
- :
- I P23 H
-
-
-
-
- 12V
-
-



V	Hz		cos	A	KW/KVA	KW/KVA
440/254	50	3	0.8	321	200/250	180/225
415/240	50	3	0.8	340	200/250	180/225
400/230	50	3	0.8	360	200/250	180/225
380/220	50	3	0.8	375	200/250	180/225

GB/T2820-97 eqv I SO8528

12

1 10%





/

VD135TD19

6

13.5L

x

138x 150 mm

15.5

1500rpm

210KW



100%

232g/KWh

75%

227g/KWh

50%


223g/KWh



24L

0.67g/kwh

360



50L

76-88

100




苏州

MCCB


PMG

“ ”
ATS

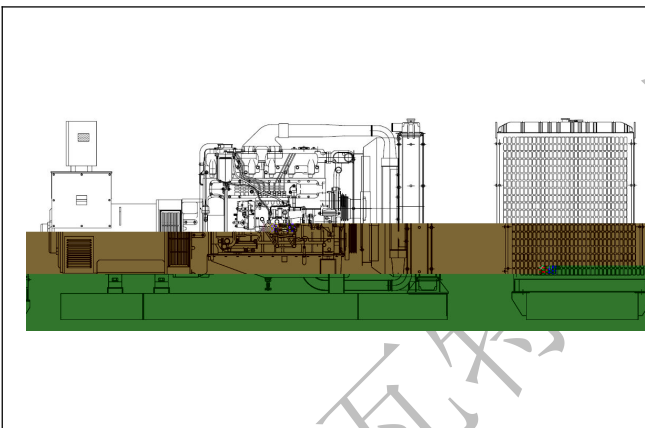

2700 mm × 900 mm × 1800 mm
2300kg

2850 mm × 1000 mm × 1920 mm
2450kg

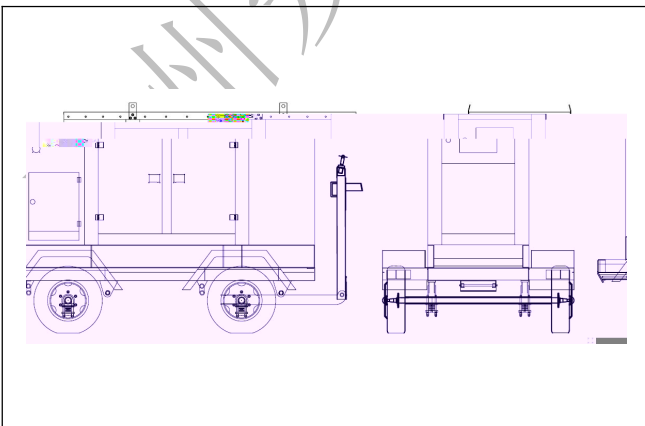

3250 mm × 1250 mm × 2150 mm
2860kg

3660 mm × 1780 mm × 2670 mm
3350kg



标准型机组控制屏是满足机组正常操作、使用的最基本配置，具有操作简便、功能齐全、保护可靠等优点。功能特点：采用众智控制器；显示屏；机组具有手动开机、关机（急停）等控制功能，具有油压低、水温高、超速、电压高、电压低、过流等多种保护功能，可满足各种机组的需要。



ATS

